





E-CATALOGUE





Established in 1989, Rang Décor has become a beacon of innovation in the realm of interior design and décor. With unwavering dedication and a passion for excellence, we have set new benchmarks, leaving a lasting legacy in the industry. In 2015, we embarked on a transformative journey with the launch of our iconic brand name, "Rang Décor."

PASSION

Our team is driven by a love for design and aesthetics. We pour our hearts into every project, ensuring that each design is a work of art. We stay updated on the latest design trends to bring fresh ideas and creativity to make each product unique.

INTEGRITY

Our commitment to ethical practices means we deliver on promises and maintain transparent communication, building lasting relationships with our clients.

TRUST

Client trust is paramount. We understand our client's needs and preferences, ensuring that we deliver services that exceed their expectations.

INNOVATION

We keep constantly evolving with new trends in building materials industry to offer the best products which can transform spaces aesthetically.



ANTI-SCRATCH CERTIFICATE













Application Guide, Technical Support & Warranty





Application Areas

Faded Acrylic laminates offer a premium, long-lasting surface solution for modern interiors. With a rich matte or gloss finish, they are suitable for a wide range of applications.

Recommended Applications: Residential Interiors:

- Kitchen shutters and wall cabinets
- Bathroom vanities and wardrobes
- Living room furniture and entertainment units
- Bedroom sliding doors and headboards

Commercial Spaces:

- Retail display shelves and counters
- Office desks and partitions
- Hotel receptions and hospitality interiors

Technical Guidelines Product Specifications:

- Type : Pure Acrylic Laminate
- Thickness: 2 mm (±5%)
- Sheet Size : 2440 mm × 1220 mm
- Available Finishes : Matte & Gloss

Structure Composition:

- Premium Acrylic surface layer
- Adhesive interface
- Decorative color base film
- Primer layer for improved bonding

*Product dimensions may vary by ±5%. Slight color differences may exist between actual products and brochure/catalogue images

Handling, Cutting & Installation Guidelines

Proper handling and installation are essential to maintain the quality, finish, and performance of acrylic laminates.

Installation Best Practices:

- Do not roll the sheets. Faded Acrylic is not designed to be rolled under any condition.
- Store sheets flat on a smooth, even surface to prevent deformation.
- Substrate (ply, MDF, or particle board) must be clean, flat, and moisture-free.
- Thoroughly clean the back side of the acrylic sheet before adhesive application.
- Apply uniform pressure for at least 15 hours after bonding to ensure long-term adhesion.
- Use PEVA or acrylic-compatible adhesives only. Do not use SR or rubber-based adhesives.
- Do not exceed 8 ft x 2 ft panel sizes. Leave a 2 mm groove between sheets to allow air release and expansion
- Use sharp, well-balanced tools designed specifically for acrylic laminates.
- Do not cut using dull or bent blades.
- Do not install on chemically treated or dipped substrates without proper sanding.
- Do not place hot objects directly on the surface.
- Do not store leftover sheets rolled or folded, especially faded ones.





CAUSES OF YELLOW PATCHES AND COLOUR FADING AFTER INSTALLATION:



If hot cookware or utensils are directly placed on the laminate.



Use of inferior or sub-standard dipped plywood or dipped lipping patti, which may chemically react with the adhesive.



The use of synthetic rubber adhesives such as SR / Jat Pat, Bostic, Heatx, etc.



Prolonged exposure to high temperature (above 30°C-35°C)



Exposure to direct sunlight can gravity affect a laminated appearance.



Our consumers can be rest assured about using totally environment friendly products. We create innovative designs maintaining international safety and sustainability standards, leaving zero carbon footprints.

REASONS FOR AIR BUBBLE FORMATIONS ON LAMINATES:



Insufficient or lack of pressing during the bonding period of laminate



Use of water base synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)



Laminates are bonded in extremely humid conditions



Debonding in certain areas because of uneven substrate surface



When substrate loses moisture after installation



Use of extremely large acrylic/PVC laminate sheets for maximum utilization



Yellow Patches & Fading - Causes & Prevention

Causes:

- Solvent-based or SR adhesives
- Using dipped plywood or lipping without sanding
- Exposure to sunlight or UV
- Delayed removal of the protective film
- Storage in hot, humid, or dusty environments

Prevention:

- Use only PEVA-based water adhesives
- Sand dipped substrates to remove color chemicals
- Remove the film within 6-7 days
- Avoid exposure to direct sunlight or excessive heat
- Store and use in clean indoor environments only

Storage, Packing & Transportation

- Store the sheets flat in a clean, dry space, away from heat and sunlight
- Do not keep in dusty areas or for extended periods before installation
- Use only undamaged surfaces during packing and transportation
- Avoid placing heavy loads on sheets
- No claims will be accepted for transportation damage

Notes & Warranty

- Rang ensures all its products are free from manufacturing defects and are suitable for standard indoor use.
- Always inspect material before installation no claims will be accepted after cutting or bonding.
- Rang is not liable for issues caused by plywood, adhesives, or other installation materials.
- No complaints will be entertained if guidelines are not followed properly.
- Beware of counterfeit products look for the official Rang sticker before purchase.
- Product dimensions may vary by ±5%. Slight color differences may occur between actual products and catalogue images.
- Rang Faded sheets are meant for indoor use only.

Do's & Don'ts DO'S (अवश्य करें):

- Use only proper adhesive made for acrylic.
 केवल ऐक्रेलिक के लिए उपयुक्त गोंद का उपयोग करें।
- Ensure the substrate is dry, clean, and flat. सब्सट्रेट को सुखा, साफ और समतल रखें।
- Clean the back surface of the acrylic before bonding.
 बोंडिंग से पहले शीट की पिछली सतह को साफ कपड़े से साफ करें।
- Remove the protective film within 6-7 days after installation. इंस्टॉलेशन के 6-7 दिनों के भीतर प्रोटेक्टिव फिल्म हटा दें।
- Use sharp and proper acrylic cutting tools only. ऐक्रेलिक के लिए केवल उपयुक्त तेज टूल्स का उपयोग करें।
- Check batch numbers to avoid shade variations.
 शेड डिफरेंस से बचने के लिए हमेशा एक ही बैच की शीट्स का उपयोग करें।
- Leave a 2 mm air groove between two sheets. दो शीटस के बीच 2 मिमी का गैप रखें ताकि हवा बाहर निकल सके।

DON'TS (न करें):

- Do not use SR, rubber-based, or synthetic adhesives. SR, रबर-बेस या सिंथेटिक गोंद का उपयोग न करें।
- Do not use dull, damaged, or tilted blades for cutting. कटिंग के लिए टेढ़े, टूटे या ब्लंट ब्लेड का उपयोग न करें।
- Do not store sheets in dusty or dirty conditions for long periods.
 शीट्स को धूल या गंदगी वाली जगह पर लंबे समय तक न रखें।
- Do not press sheets in humid or wet environments.
- गीले या नम स्थान पर शीट्स को दबाएं नहीं। • Do not delay in removing the protective film.
- प्रोटेक्टिव फिल्म को देर तक न रखें। • Do not install on uneven, chemically treated, or
- dipped plywood without sanding. उबड़-खाबड़ या डिप्ड प्लाई पर बिना सैंडिंग के इंस्टॉल न करें।
- Do not place sheets on damaged or rough surfaces during packing or transport. ट्रांसपोर्ट या पैकिंग के दौरान शीट्स को टूटी या खराब सतह पर न रखें।
- Rang does not recommend any specific glue. Users must test for suitability before application.
 रंग किसी विशेष गोंद की सिफारिश नहीं करता। उपयोग से पहले उपयक्तता की जांच करें।









SuedeMate



Introducing RANG Faded SuedeMate Finish, a tactile masterpiece that blends luxury and functionality. This soft-touch surface captivates with its refined appearance and superior technology which elevates any interior space. The 2mm thickness ensures a sleek profile while providing long-lasting performance. Ideal for architects, designers, and discerning homeowners, it brings contemporary flair and elegance. RANG Faded Acrylic Matt enhances interiors with timeless elegance and lasting performance. Experience a surface that's as delightful to touch as it is to behold.













Application



moonlit



Pearl Essence is a harmonious blend of white, beige and soothing neutrals designed for timeless elegance. Their versatile tones reflect light beautifully, enhancing warmth and sophistication, from modern minimalism to cozy classics.






















RF 2000		
RF 2001		

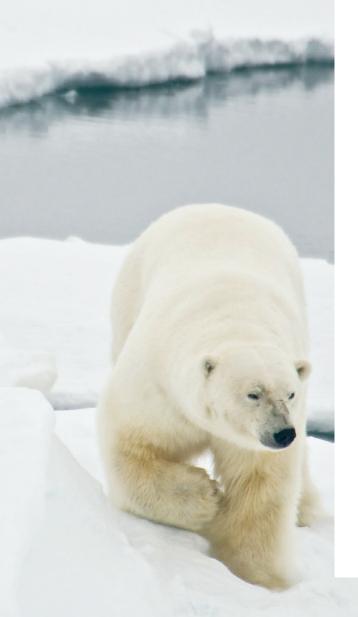

Winter Ember weaves frosty whites, snowy grays & ash neutrals into an elegant palette. Inspired by the quiet of a snow-dusted forest at dusk. This premium ember offers a soft aesthetic look, perfect for creating tranquil spaces.

































2002
















RF 2053



RF 2051 RF 2052



A light, creamy off-white shade with a soft beige undertone—perfect for bright, minimal interiors that need a clean and airy feel, while adding warmth and subtle sophistication.























RF	2061		
RF	2035		




graphite



Shadowed Slate shades with subtle cool undertones, evoking a sense of strength and elegance, ideal for dramatic accents. Together, these grays form a monochromatic palette, emphasise harmony and subtlety.



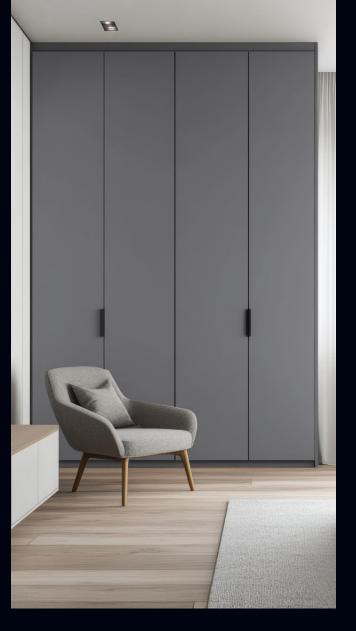




















RF	2029			
RF	2060			



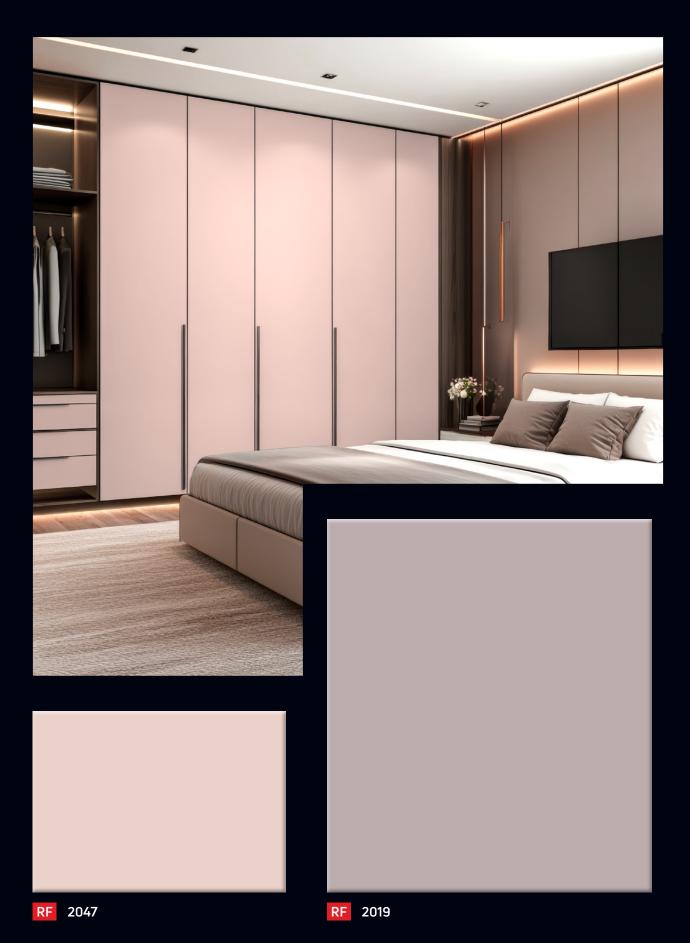





















RF 2048



salmon

Dusk Blush palette adds a neutral, stabilizing element, fostering a sense of reliability and understated elegance. Together, these colors create a cohesive, harmonious scheme with a balance of warm and cool tones!





Faded Elegance has Dark black and greys form a moody, sophisticated palette rooted in neutrality and depth. These colors pair well with bold accents or metallics for added dynamism. This palette can feel somber or serene, creating a refined and contemplative atmosphere.





















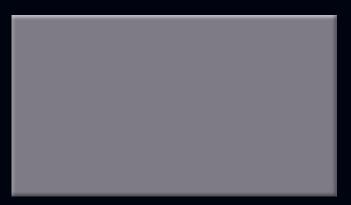












RF

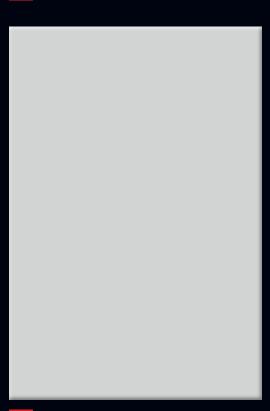



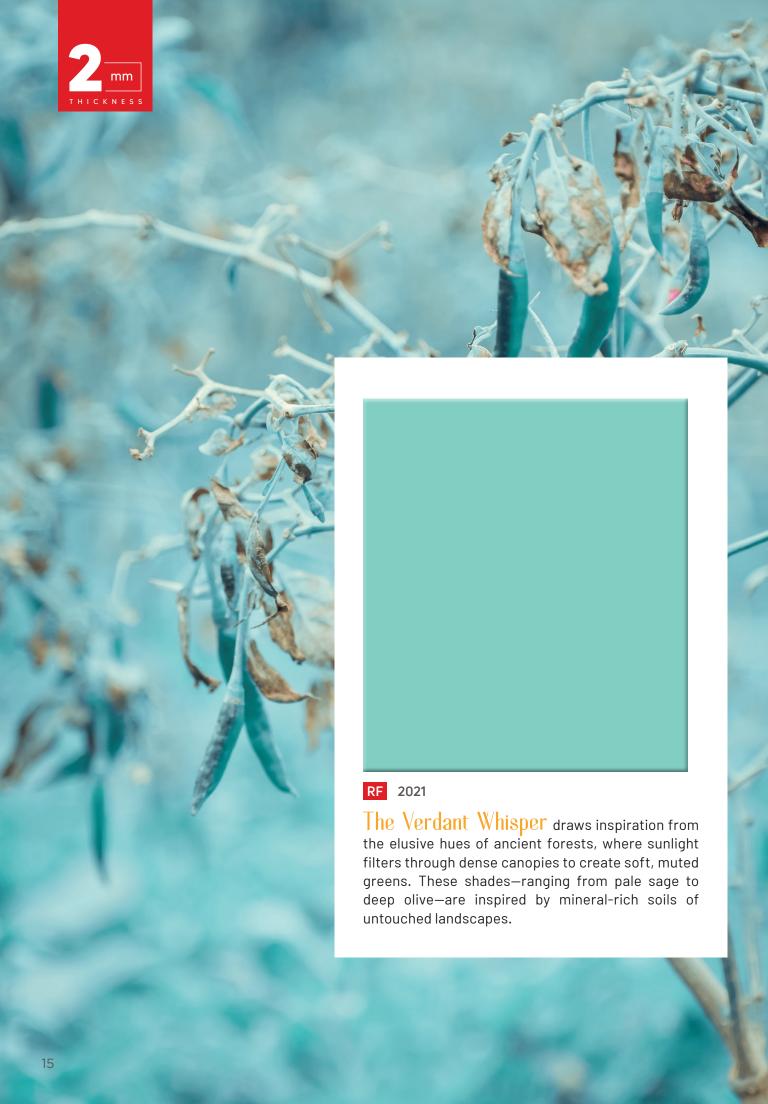






















RF 2030



RF 2033



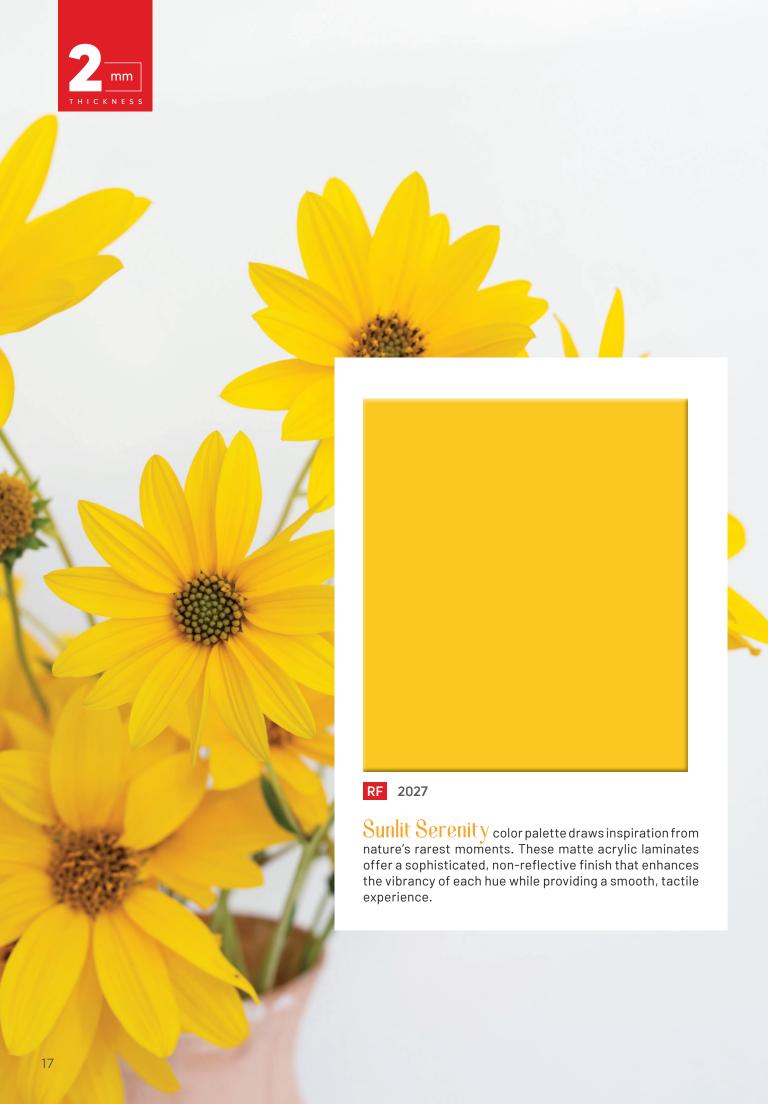























RF 2026

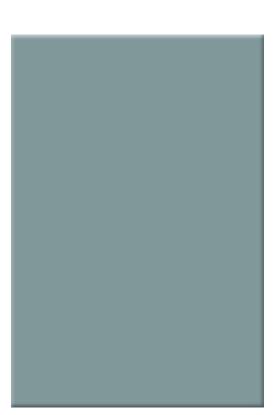

RF 2034



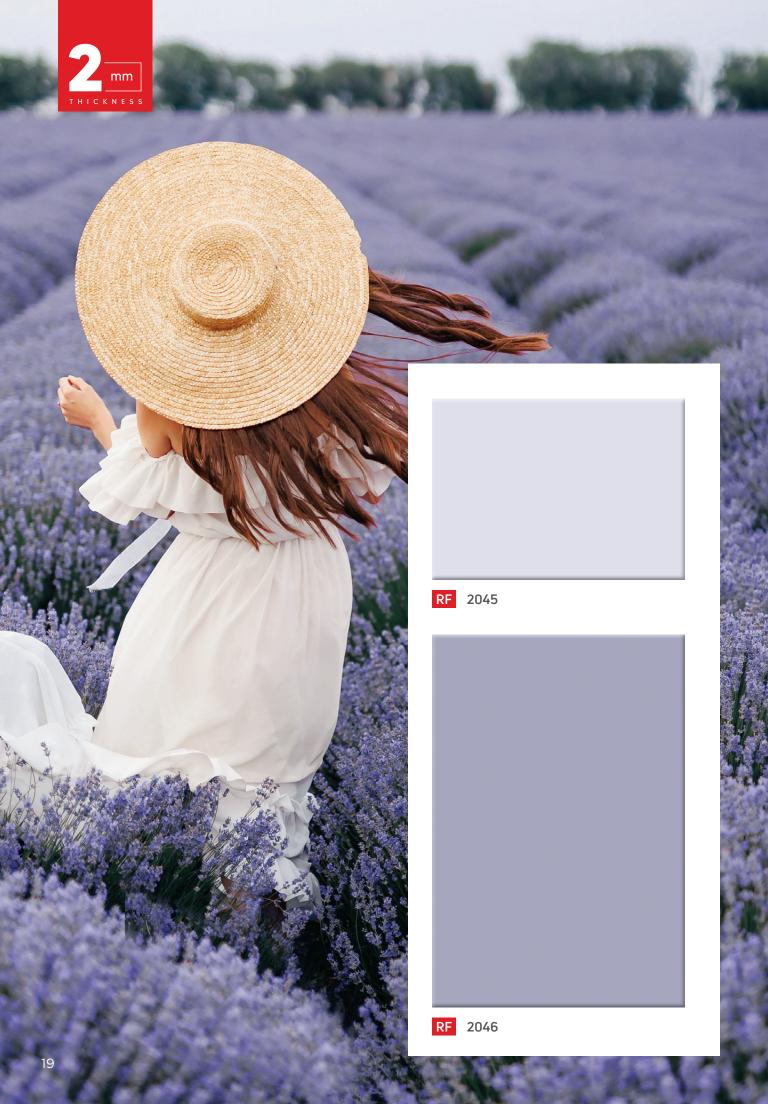


















Dreamscape palette draws inspiration from the serene hues of Provence lavender fields at dawn, blended with the soft whispers of a Nordic winter sky. A soothing blend of misty purples, muted lilacs, soft greys with a hint of earthy green.



2022



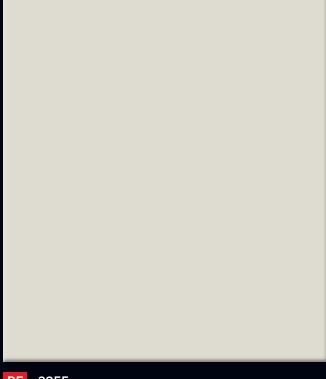

2055



2033

Features







RACTEDIAL



FORMALDEHYDE



RER & TERMITE



6H



WATER

Application









HOTEL



MALL



HOSPITAL





Faded Gloss

Faded Glossy acrylic laminate with 2mm thickness is ideal for vertical applications, offering a sleek, modern high-gloss finish. Its enhanced strength and lightweight profile ensure durability and ease of installation. Designed to resist warping and maintain luster, it's a top choice for residential and commercial interior projects.


























RF 1053

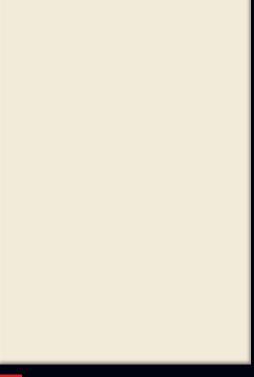

RF 1002

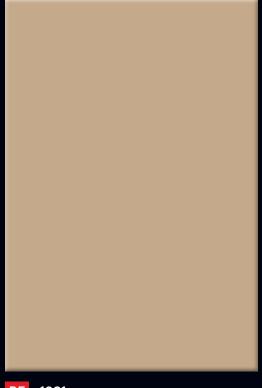

























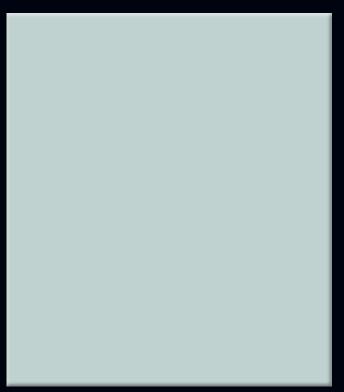

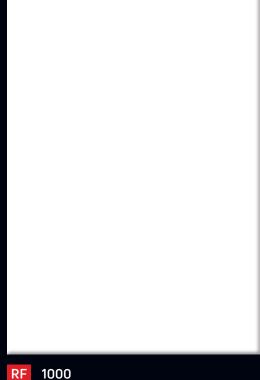

RF 1028







impressions





















Faded is a collection you must not miss. Crafted with high-quality acrylic, our acrylic laminates are designed for durability, resisting scratches and fading while maintaining their subtle, nature-inspired elegance, making them a perfect choice for those seeking to infuse spaces with a quiet, harmonious charm.

MATCHING EDGE BANDING


RANG EDGE BAND			REHAU EDGE BAND		
1	RF 2001	8001	12	RF 2003	75705
2	RF 2002	8002	13	RF 2007	110135
3	RF 2016	8007	14	RF 2009	75712
4	RF 2018	8015	15	RF 2013	75705
5	RF 2029	8005	16	RF 2022	75609
6	RF 2043	8011	17	RF 2027	75743
7	RF 2051	8015	18	RF 2035	110119
8	RF 2053	8020	19	RF 2036	75633
9	RF 2055	8003	20	RF 2020	75710
10	RF 2058	8016	21	RF 2057	75703
11	RF 2061	8004	22	RF 2060	75733

E3 EDGE BAND						
23	RF 2000	1001				
24	RF 2017	1004				
25	RF 2045	1101				
26	RF 2050	1054				

HAVE YOU VISITED OUR INSTAGRAM PROFILE YET?



Scan QR code and Follow

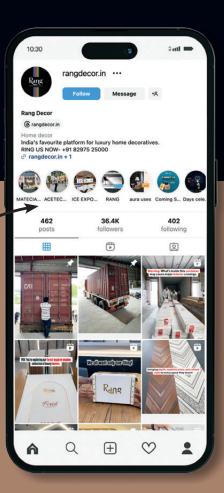

INDEX



Sr. No.	Desing No.	Pg. No.
1	RF 1000	26
2	RF 1001	24
3	RF 1002	24
4	RF 1016	26
5	RF 1028	26
6	RF 1052	23
7	RF 1053	24
8	RF 1059	26
9	RF 1061	24
10	RF 2000	2, 18
11	RF 2001	2
12	RF 2002	2, 6
13	RF 2003	4
14	RF 2005	14
15	RF 2007	8
16	RF 2009	13
17	RF 2013	4
18	RF 2014	14
19	RF 2016	10
20	RF 2017	14
21	RF 2018	4
22	RF 2019	11
23	RF 2020	18
24	RF 2021	15
25	RF 2022 12, 20	
26	RF 2026 18	
27	RF 2027	17

Sr. No.	Desing No.	Pg. No.
28	RF 2028	16
29	RF 2029	10
30	RF 2030	16
31	RF 2031	16
32	RF 2033	16, 20
33	RF 2034	18
34	RF 2035	8
35	RF 2036	5
36	RF 2042	12
37	RF 2043	16
38	RF 2045	19
39	RF 2046	19
40	RF 2047	11
41	RF 2048	12
42	RF 2049	12
43	RF 2050	4
44	RF 2051	6
45	RF 2052	6
46	RF 2053	6
47	RF 2055	5, 20
48	RF 2056	4
49	RF 2057	3
50	RF 2058	14
51	RF 2059	14
52	RF 2060	10
53	RF 2061	8





OUR RANGE OF PRODUCTS





































