



RANGE OF DECORATIVE PRODUCTS

ACRYLIC 2.0

FADEDTM
ACRYLIC 2.0



E-CATALOGUE



Rang[®]

RANGE OF DECORATIVE PRODUCTS

Established in 1989, Rang Décor has become a beacon of innovation in the realm of interior design and décor. With unwavering dedication and a passion for excellence, we have set new benchmarks, leaving a lasting legacy in the industry. In 2015, we embarked on a transformative journey with the launch of our iconic brand name, “**Rang Décor.**”

PASSION

Our team is driven by a love for design and aesthetics. We pour our hearts into every project, ensuring that each design is a work of art. We stay updated on the latest design trends to bring fresh ideas and creativity to make each product unique.

INTEGRITY

Our commitment to ethical practices means we deliver on promises and maintain transparent communication, building lasting relationships with our clients.

TRUST

Client trust is paramount. We understand our client's needs and preferences, ensuring that we deliver services that exceed their expectations.

INNOVATION

We keep constantly evolving with new trends in building materials industry to offer the best products which can transform spaces aesthetically.



ANTI-SCRATCH CERTIFICATE

VM

VIRTUE META-SOL
MATERIAL SOLUTIONS
SHOP NO: 687, GROUND FLOOR, SRI VIKAS CONTROL,
CHIVOTE BALANAGIRI POLICE STATION, HYDERABAD, TELANGANA, INDIA 500 042.

TEST REPORT

Issued To:
Bharat Agastya Pvt. Ltd.,
#18-1-995/1, Aghapura, Hyderabad.

Test Report No:
VMS/JC/24-25/0093-1/1
Test Report Date:
25.01.2025

SAMPLE PARTICULARS

Page 1 of 1

Sample Details:
Acrylic sheets
Sample Description:
Karyo Faded Acrylic
Reference Number:
NA
Date of Receipt:
08.01.2025
Date of Testing:
08.01.2025
Date of Completion:
25.01.2025

Test Requested:
Chemical, Mechanical, Physical and Fire Resistance

Test Results

Page 1 of 1

No.	Test parameters	UOM	Specification	Results
1	Chemical Properties			
1.1	Material Identification	--	Shall be PMMA	The given sample is subjected to FTIR spectra. Spectra showing the presence of "Poly methyl methacrylate" (Spectrum attached).

Test Method: FTIR (Spectroscopy)

Disclaimer 1: This report relates only to the particular sample submitted for test.

Disclaimer 2: Sample is done by the customer.

END OF THE REPORT

BR

By: 

Test Engineer

BR

By: 

Test Engineer

BRANCH FOOT NO: 7/8-2 PHASE - II, SA, CHERLAPALLY, HYDERABAD, TELANGANA - 500 051.
E Mail: ID: virtue.metal.com, Phone No: 9000181727, 9000031727
130532/78199 Fax No: 687874

VM

VIRTUE META-SOL
MATERIAL SOLUTIONS
SHOP NO: 687, GROUND FLOOR, SRI VIKAS CONTROL,
CHIVOTE BALANAGIRI POLICE STATION, HYDERABAD, TELANGANA, INDIA 500 042.

TEST REPORT

Issued To:
Bharat Agastya Pvt. Ltd.,
#18-1-995/1, Aghapura, Hyderabad.

Test Report No:
VMS/JC/24-25/0093-1/2
Test Report Date:
25.01.2025

SAMPLE PARTICULARS

Page 1 of 1

Sample Details:
Acrylic sheets
Sample Description:
Karyo Faded Acrylic
Reference Number:
NA
Date of Receipt:
08.01.2025
Date of Testing:
08.01.2025
Date of Completion:
25.01.2025

Test Requested:
Chemical, Mechanical, Physical and Fire Resistance

Test Results

Page 1 of 1

No.	Test parameters	UOM	Specification	Results
1	Physical Properties			
1.1	Thickness	mm	--	3.33
1.2	Weight	gms	--	8.55
1.3	Thickness	mm	--	3.33
1.4	Weight	gms	--	8.55

Test Method: VMS (Spectroscopy)

Disclaimer 1: This report relates only to the particular sample submitted for test.

Disclaimer 2: Sample is done by the customer.

END OF THE REPORT

BR

By: 

Test Engineer

BR

By: 

Test Engineer

BRANCH FOOT NO: 7/8-2 PHASE - II, SA, CHERLAPALLY, HYDERABAD, TELANGANA - 500 051.
E Mail: ID: virtue.metal.com, Phone No: 9000181727, 9000031727
130532/78199 Fax No: 687874

VM

VIRTUE META-SOL
MATERIAL SOLUTIONS
SHOP NO: 687, GROUND FLOOR, SRI VIKAS CONTROL,
CHIVOTE BALANAGIRI POLICE STATION, HYDERABAD, TELANGANA, INDIA 500 042.

TEST REPORT

Issued To:
Bharat Agastya Pvt. Ltd.,
#18-1-995/1, Aghapura, Hyderabad.

Test Report No:
VMS/JC/24-25/0093-1/3
Test Report Date:
25.01.2025

SAMPLE PARTICULARS

Page 1 of 1

Sample Details:
Acrylic sheets
Sample Description:
Karyo Faded Acrylic
Reference Number:
NA
Date of Receipt:
08.01.2025
Date of Testing:
08.01.2025
Date of Completion:
25.01.2025

Test Requested:
Chemical, Mechanical, Physical and Fire Resistance

Test Results

Page 1 of 1

No.	Test parameters	UOM	Specification	Results
1	Mechanical Properties			
1.1	Impact (Charpy)	ft-lb	85.138	85.33
1.2	Impact (Charpy)	ft-lb	85.138	85.33
1.3	Impact (Charpy)	ft-lb	85.138	85.33

Test Method: VMS (Spectroscopy)

Disclaimer 1: This report relates only to the particular sample submitted for test.

Disclaimer 2: Sample is done by the customer.

END OF THE REPORT

BR

By: 

Test Engineer

BR

By: 

Test Engineer

BRANCH FOOT NO: 7/8-2 PHASE - II, SA, CHERLAPALLY, HYDERABAD, TELANGANA - 500 051.
E Mail: ID: virtue.metal.com, Phone No: 9000181727, 9000031727
130532/78199 Fax No: 687874

VM

VIRTUE META-SOL
MATERIAL SOLUTIONS
SHOP NO: 687, GROUND FLOOR, SRI VIKAS CONTROL,
CHIVOTE BALANAGIRI POLICE STATION, HYDERABAD, TELANGANA, INDIA 500 042.

TEST REPORT

Issued To:
Bharat Agastya Pvt. Ltd.,
#18-1-995/1, Aghapura, Hyderabad.

Test Report No:
VMS/JC/24-25/0093-1/4
Test Report Date:
25.01.2025

SAMPLE PARTICULARS

Page 1 of 1

Sample Details:
Acrylic sheets
Sample Description:
Karyo Faded Acrylic
Reference Number:
NA
Date of Receipt:
08.01.2025
Date of Testing:
08.01.2025
Date of Completion:
25.01.2025

Test Requested:
Chemical, Mechanical, Physical and Fire Resistance

Test Results

Page 1 of 1

No.	Test parameters	UOM	Specification	Results
1	Fire Resistance			
1.1	Fire Rating	--	02-30	01
1.2	Flame Spread Index	--	02-30	01
1.3	Smoke Density	--	02-30	01
1.4	Life of the product	hrs	13-30	18

Test Method: VMS (Spectroscopy)

Disclaimer 1: This report relates only to the particular sample submitted for test.

Disclaimer 2: Sample is done by the customer.

END OF THE REPORT

BR

By: 

Test Engineer

BR

By: 

Test Engineer

BRANCH FOOT NO: 7/8-2 PHASE - II, SA, CHERLAPALLY, HYDERABAD, TELANGANA - 500 051.
E Mail: ID: virtue.metal.com, Phone No: 9000181727, 9000031727
130532/78199 Fax No: 687874

VM

VIRTUE META-SOL
MATERIAL SOLUTIONS
SHOP NO: 687, GROUND FLOOR, SRI VIKAS CONTROL,
CHIVOTE BALANAGIRI POLICE STATION, HYDERABAD, TELANGANA, INDIA 500 042.

TEST REPORT

Issued To:
Bharat Agastya Pvt. Ltd.,
#18-1-995/1, Aghapura, Hyderabad.

Test Report No:
VMS/JC/24-25/0093-1/5
Test Report Date:
25.01.2025

SAMPLE PARTICULARS

Page 1 of 1

Sample Details:
Acrylic sheets
Sample Description:
Karyo Faded Acrylic
Reference Number:
NA
Date of Receipt:
08.01.2025
Date of Testing:
08.01.2025
Date of Completion:
25.01.2025

Test Requested:
Chemical, Mechanical, Physical and Fire Resistance

Test Results

Page 1 of 1

No.	Test parameters	UOM	Specification	Results
1	Chemical Properties			
1.1	Life of the product	hrs	--	18

Test Method: VMS (Spectroscopy)

Disclaimer 1: This report relates only to the particular sample submitted for test.

Disclaimer 2: Sample is done by the customer.

END OF THE REPORT

BR

By: 

Test Engineer

BR

By: 


Test Engineer

BRANCH FOOT NO: 7/8-2 PHASE - II, SA, CHERLAPALLY, HYDERABAD, TELANGANA - 500 051.
E Mail: ID: virtue.metal.com, Phone No: 9000181727, 9000031727
130532/78199 Fax No: 687874



TEST PASS

Application Guide, Technical Support & Warranty

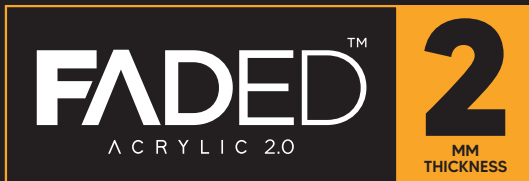

Application Areas

Faded Acrylic laminates offer a premium, long-lasting surface solution for modern interiors. With a rich matte or gloss finish, they are suitable for a wide range of applications.

Recommended Applications:

Residential Interiors:

- Kitchen shutters and wall cabinets
- Bathroom vanities and wardrobes
- Living room furniture and entertainment units
- Bedroom sliding doors and headboards

Commercial Spaces:

- Retail display shelves and counters
- Office desks and partitions
- Hotel receptions and hospitality interiors

Technical Guidelines

Product Specifications:

- Type : Pure Acrylic Laminate
- Thickness : 2 mm ($\pm 5\%$)
- Sheet Size : 2440 mm $\times$ 1220 mm
- Available Finishes : Matte & Gloss

Structure Composition:

- Premium Acrylic surface layer
- Adhesive interface
- Decorative color base film
- Primer layer for improved bonding

*Product dimensions may vary by $\pm 5\%$. Slight color differences may exist between actual products and brochure/catalogue images

Handling, Cutting & Installation Guidelines

Proper handling and installation are essential to maintain the quality, finish, and performance of acrylic laminates.

Installation Best Practices:

- Do not roll the sheets. Faded Acrylic is not designed to be rolled under any condition.
- Store sheets flat on a smooth, even surface to prevent deformation.
- Substrate (ply, MDF, or particle board) must be clean, flat, and moisture-free.
- Thoroughly clean the back side of the acrylic sheet before adhesive application.
- Apply uniform pressure for at least 15 hours after bonding to ensure long-term adhesion.
- Use PEVA or acrylic-compatible adhesives only. Do not use SR or rubber-based adhesives.
- Do not exceed 8 ft $\times$ 2 ft panel sizes. Leave a 2 mm groove between sheets to allow air release and expansion.
- Use sharp, well-balanced tools designed specifically for acrylic laminates.
- Do not cut using dull or bent blades.
- Do not install on chemically treated or dipped substrates without proper sanding.
- Do not place hot objects directly on the surface.
- Do not store leftover sheets rolled or folded, especially faded ones.



CAUSES OF YELLOW PATCHES AND COLOUR FADING AFTER INSTALLATION:



If hot cookware or utensils are directly placed on the laminate.



Use of inferior or sub-standard dipped plywood or dipped lipping patti, which may chemically react with the adhesive.



The use of synthetic rubber adhesives such as SR / Jat Pat, Bostic, Heatx, etc.



Prolonged exposure to high temperature (above 30°C-35°C)



Exposure to direct sunlight can greatly affect a laminated appearance.



Our consumers can be rest assured about using totally environment friendly products. We create innovative designs maintaining international safety and sustainability standards, leaving zero carbon footprints.

REASONS FOR AIR BUBBLE FORMATIONS ON LAMINATES:



Insufficient or lack of pressing during the bonding period of laminate



Use of water base synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)



Laminates are bonded in extremely humid conditions



Debonding in certain areas because of uneven substrate surface



When substrate loses moisture after installation



Use of extremely large acrylic/PVC laminate sheets for maximum utilization



Yellow Patches & Fading – Causes & Prevention

Causes:

- Solvent-based or SR adhesives
- Using dipped plywood or lipping without sanding
- Exposure to sunlight or UV
- Delayed removal of the protective film
- Storage in hot, humid, or dusty environments

Prevention:

- Use only PEVA-based water adhesives
- Sand dipped substrates to remove color chemicals
- Remove the film within 6-7 days
- Avoid exposure to direct sunlight or excessive heat
- Store and use in clean indoor environments only

Storage, Packing & Transportation

- Store the sheets flat in a clean, dry space, away from heat and sunlight
- Do not keep in dusty areas or for extended periods before installation
- Use only undamaged surfaces during packing and transportation
- Avoid placing heavy loads on sheets
- No claims will be accepted for transportation damage

Notes & Warranty

- Rang ensures all its products are free from manufacturing defects and are suitable for standard indoor use.
- Always inspect material before installation — no claims will be accepted after cutting or bonding.
- Rang is not liable for issues caused by plywood, adhesives, or other installation materials.
- No complaints will be entertained if guidelines are not followed properly.
- Beware of counterfeit products — look for the official Rang sticker before purchase.
- Product dimensions may vary by $\pm 5\%$. Slight color differences may occur between actual products and catalogue images.
- Rang Faded sheets are meant for indoor use only.

Do's & Don'ts

DO'S (अवश्य करें):

- Use only proper adhesive made for acrylic. केवल ऐक्रेलिक के लिए उपयुक्त गोंद का उपयोग करें।
- Ensure the substrate is dry, clean, and flat. सब्सट्रेट को सूखा, साफ और समतल रखें।
- Clean the back surface of the acrylic before bonding. बोंडिंग से पहले शीट की पिछली सतह को साफ कपड़े से साफ करें।
- Remove the protective film within 6-7 days after installation. इंस्टॉलेशन के 6-7 दिनों के भीतर प्रोटेक्टिव फिल्म हटा दें।
- Use sharp and proper acrylic cutting tools only. ऐक्रेलिक के लिए केवल उपयुक्त तेज टूल्स का उपयोग करें।
- Check batch numbers to avoid shade variations. शेड डिफरेंस से बचने के लिए हमेशा एक ही बैच की शीट्स का उपयोग करें।
- Leave a 2 mm air groove between two sheets. दो शीट्स के बीच 2 मिमी का गैप रखें ताकि हवा बाहर निकल सके।

DON'TS (न करें):

- Do not use SR, rubber-based, or synthetic adhesives. SR, रबर-बेस या सिंथेटिक गोंद का उपयोग न करें।
- Do not use dull, damaged, or tilted blades for cutting. कटिंग के लिए टेढ़े, टूटे या ब्लंट ब्लेड का उपयोग न करें।
- Do not store sheets in dusty or dirty conditions for long periods. शीट्स को धूल या गंदगी वाली जगह पर लंबे समय तक न रखें।
- Do not press sheets in humid or wet environments. गीले या नम स्थान पर शीट्स को दबाएं नहीं।
- Do not delay in removing the protective film. प्रोटेक्टिव फिल्म को देर तक न रखें।
- Do not install on uneven, chemically treated, or dipped plywood without sanding. उबड़-खाबड़ या डिप्ड प्लाई पर बिना सैंडिंग के इंस्टॉल न करें।
- Do not place sheets on damaged or rough surfaces during packing or transport. ट्रांसपोर्ट या पैकिंग के दौरान शीट्स को टूटी या खराब सतह पर न रखें।
- Rang does not recommend any specific glue. Users must test for suitability before application. रंग किसी विशेष गोंद की सिफारिश नहीं करता। उपयोग से पहले उपयुक्तता की जांच करें।



Features



ANTI
FINGERPRINT



ULTRA
MATT



NOT
REFLECTED



ANTI
YELLOW



ANTI
BACTERIAL



NO
FORMALDEHYDE



BORER & TERMITES
RESISTANT



6H
HARDNESS



WATER
RESISTANT





FADEDTM
A C R Y L I C 2.0

SuedeMate

**1ST TIME
IN INDIA**

Introducing RANG Faded SuedeMate Finish, a tactile masterpiece that blends luxury and functionality. This soft-touch surface captivates with its refined appearance and superior technology which elevates any interior space. The 2mm thickness ensures a sleek profile while providing long-lasting performance. Ideal for architects, designers, and discerning homeowners, it brings contemporary flair and elegance. RANG Faded Acrylic Matt enhances interiors with timeless elegance and lasting performance. Experience a surface that's as delightful to touch as it is to behold.



Application



HOME



OFFICE



HOTEL



MALL



HOSPITAL

moonlit

Pearl Essence is a harmonious blend of white, beige and soothing neutrals designed for timeless elegance. Their versatile tones reflect light beautifully, enhancing warmth and sophistication, from modern minimalism to cozy classics.





ANTI
YELLOW



ANTI
BACTERIAL



NO
FORMALDEHYDE



BORER & TERMITES
RESISTANT



WATER
RESISTANT



RH
HARDNESS




ANTI
FINGERPRINT


FADEDTM
ACRYLIC 2.0



RF 2000




RF 2001



RF 2002

2mm
THICKNESS




RF 2057


Winter Ember weaves frosty whites, snowy grays & ash neutrals into an elegant palette. Inspired by the quiet of a snow-dusted forest at dusk. This premium ember offers a soft aesthetic look, perfect for creating tranquil spaces.




FADEDTM
ACRYLIC 2.0




RF 2050




RF 2018




RF 2056

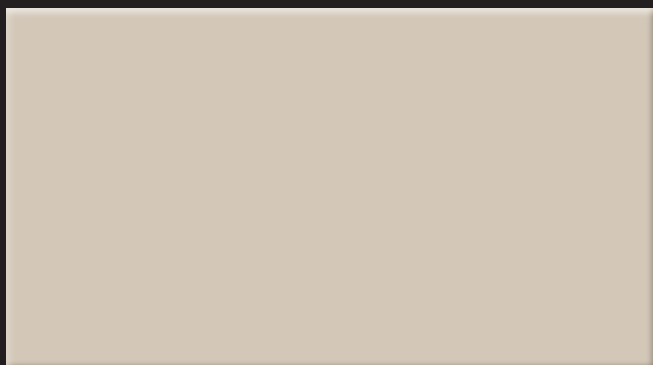

RF 2003



RF 2013

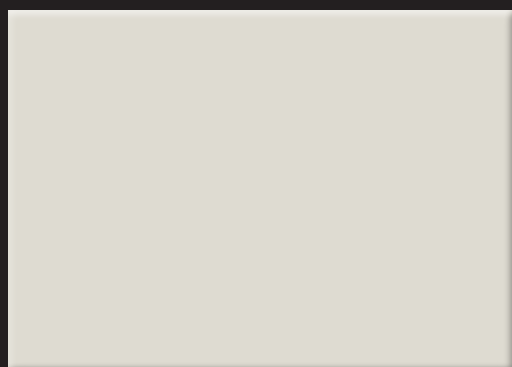


RF 2055




RF 2036




FADEDTM
ACRYLIC 2.0

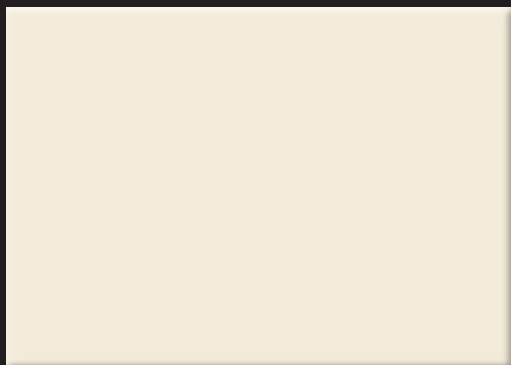


RF 2002



RF 2053

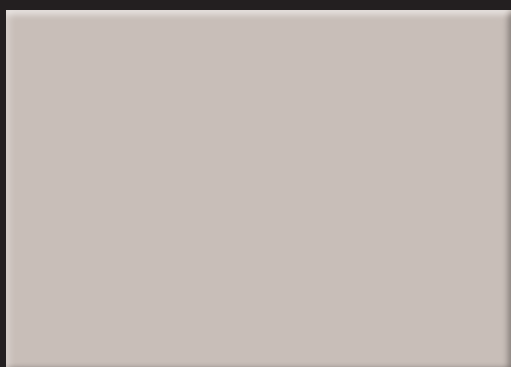

RF 2051



RF 2052



saddle

A **light**, creamy off-white shade with a soft beige undertone—perfect for bright, minimal interiors that need a clean and airy feel, while adding warmth and subtle sophistication.

dimensional



Desert Tints are all from the neutral family, with varying degrees of warmth and depth. These shades are often associated with stability, warmth, and neutrality. They can evoke feelings of comfort and reliability.



ANTI
YELLOW



ANTI
BACTERIAL



NO
FORMALDEHYDE



BORER & TERMITES
RESISTANT



WATER
RESISTANT



RH
HARDNESS



ANTI
FINGERPRINT


FADEDTM
ACRYLIC 2.0



RF 2061



RF 2035



RF 2007


graphite

Shadowed Slate shades with subtle cool undertones, evoking a sense of strength and elegance, ideal for dramatic accents. Together, these grays form a monochromatic palette, emphasise harmony and subtlety.





FADEDTM
ACRYLIC 2.0




RF 2029




RF 2060




RF 2016

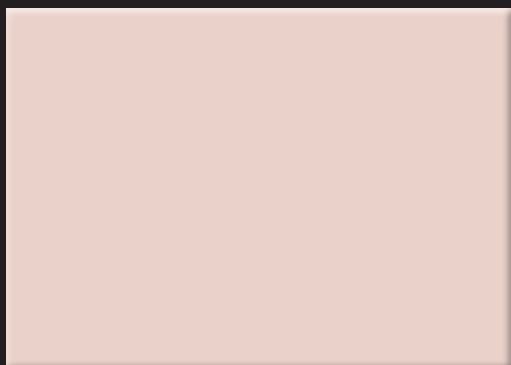


RF 2047




RF 2019

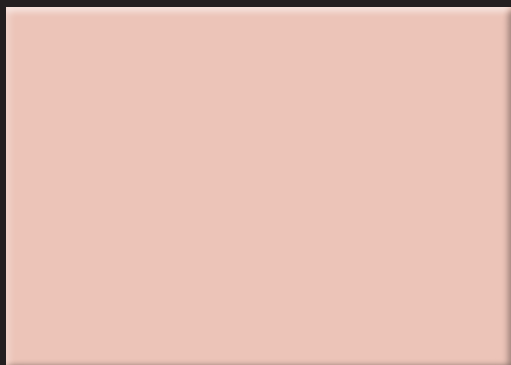


RF 2022

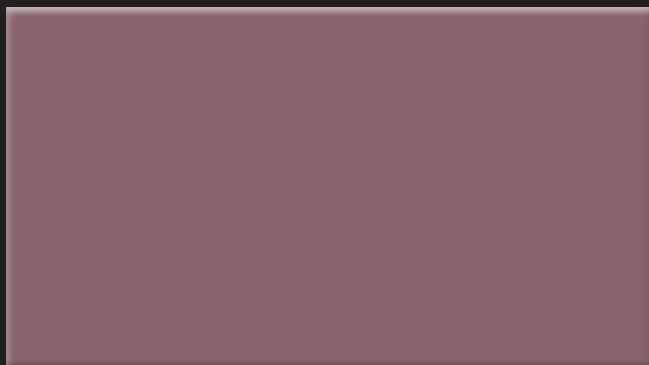

RF 2042

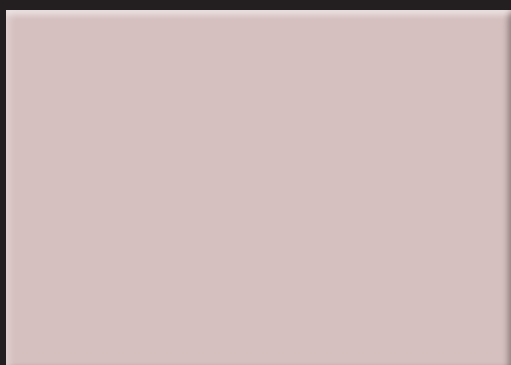

RF 2048



RF 2049



salmon

Dusk Blush palette adds a neutral, stabilizing element, fostering a sense of reliability and understated elegance. Together, these colors create a cohesive, harmonious scheme with a balance of warm and cool tones!


Faded Elegance has Dark black and greys form a moody, sophisticated palette rooted in neutrality and depth. These colors pair well with bold accents or metallics for added dynamism. This palette can feel somber or serene, creating a refined and contemplative atmosphere.




RF 2009




FADEDTM
ACRYLIC 2.0

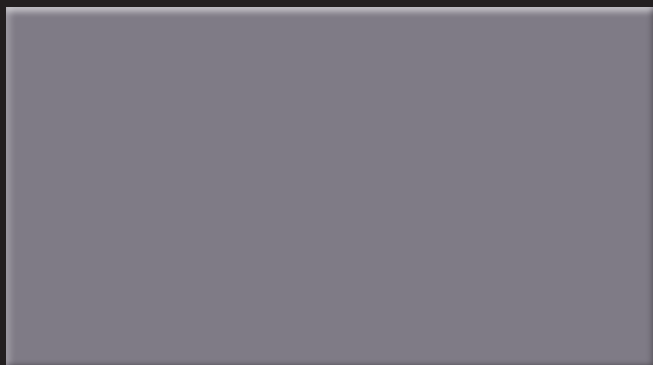


RF 2014




RF 2017




RF 2058

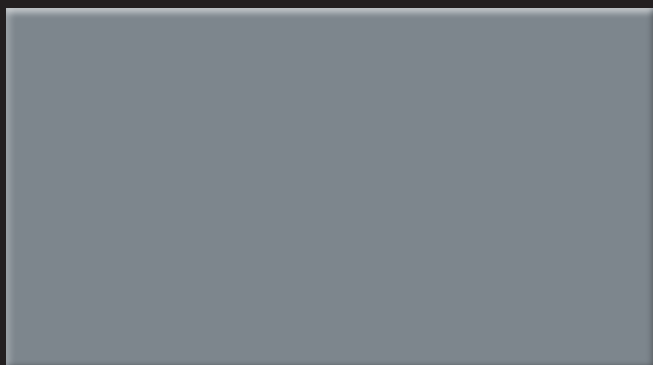

RF 2059

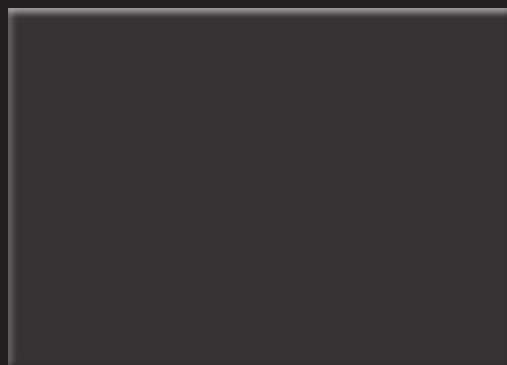

RF 2005



RF 2021


The Verdant Whisper draws inspiration from the elusive hues of ancient forests, where sunlight filters through dense canopies to create soft, muted greens. These shades—ranging from pale sage to deep olive—are inspired by mineral-rich soils of untouched landscapes.



RF 2028



RF 2030





RF 2033



RF 2043



RF 2031

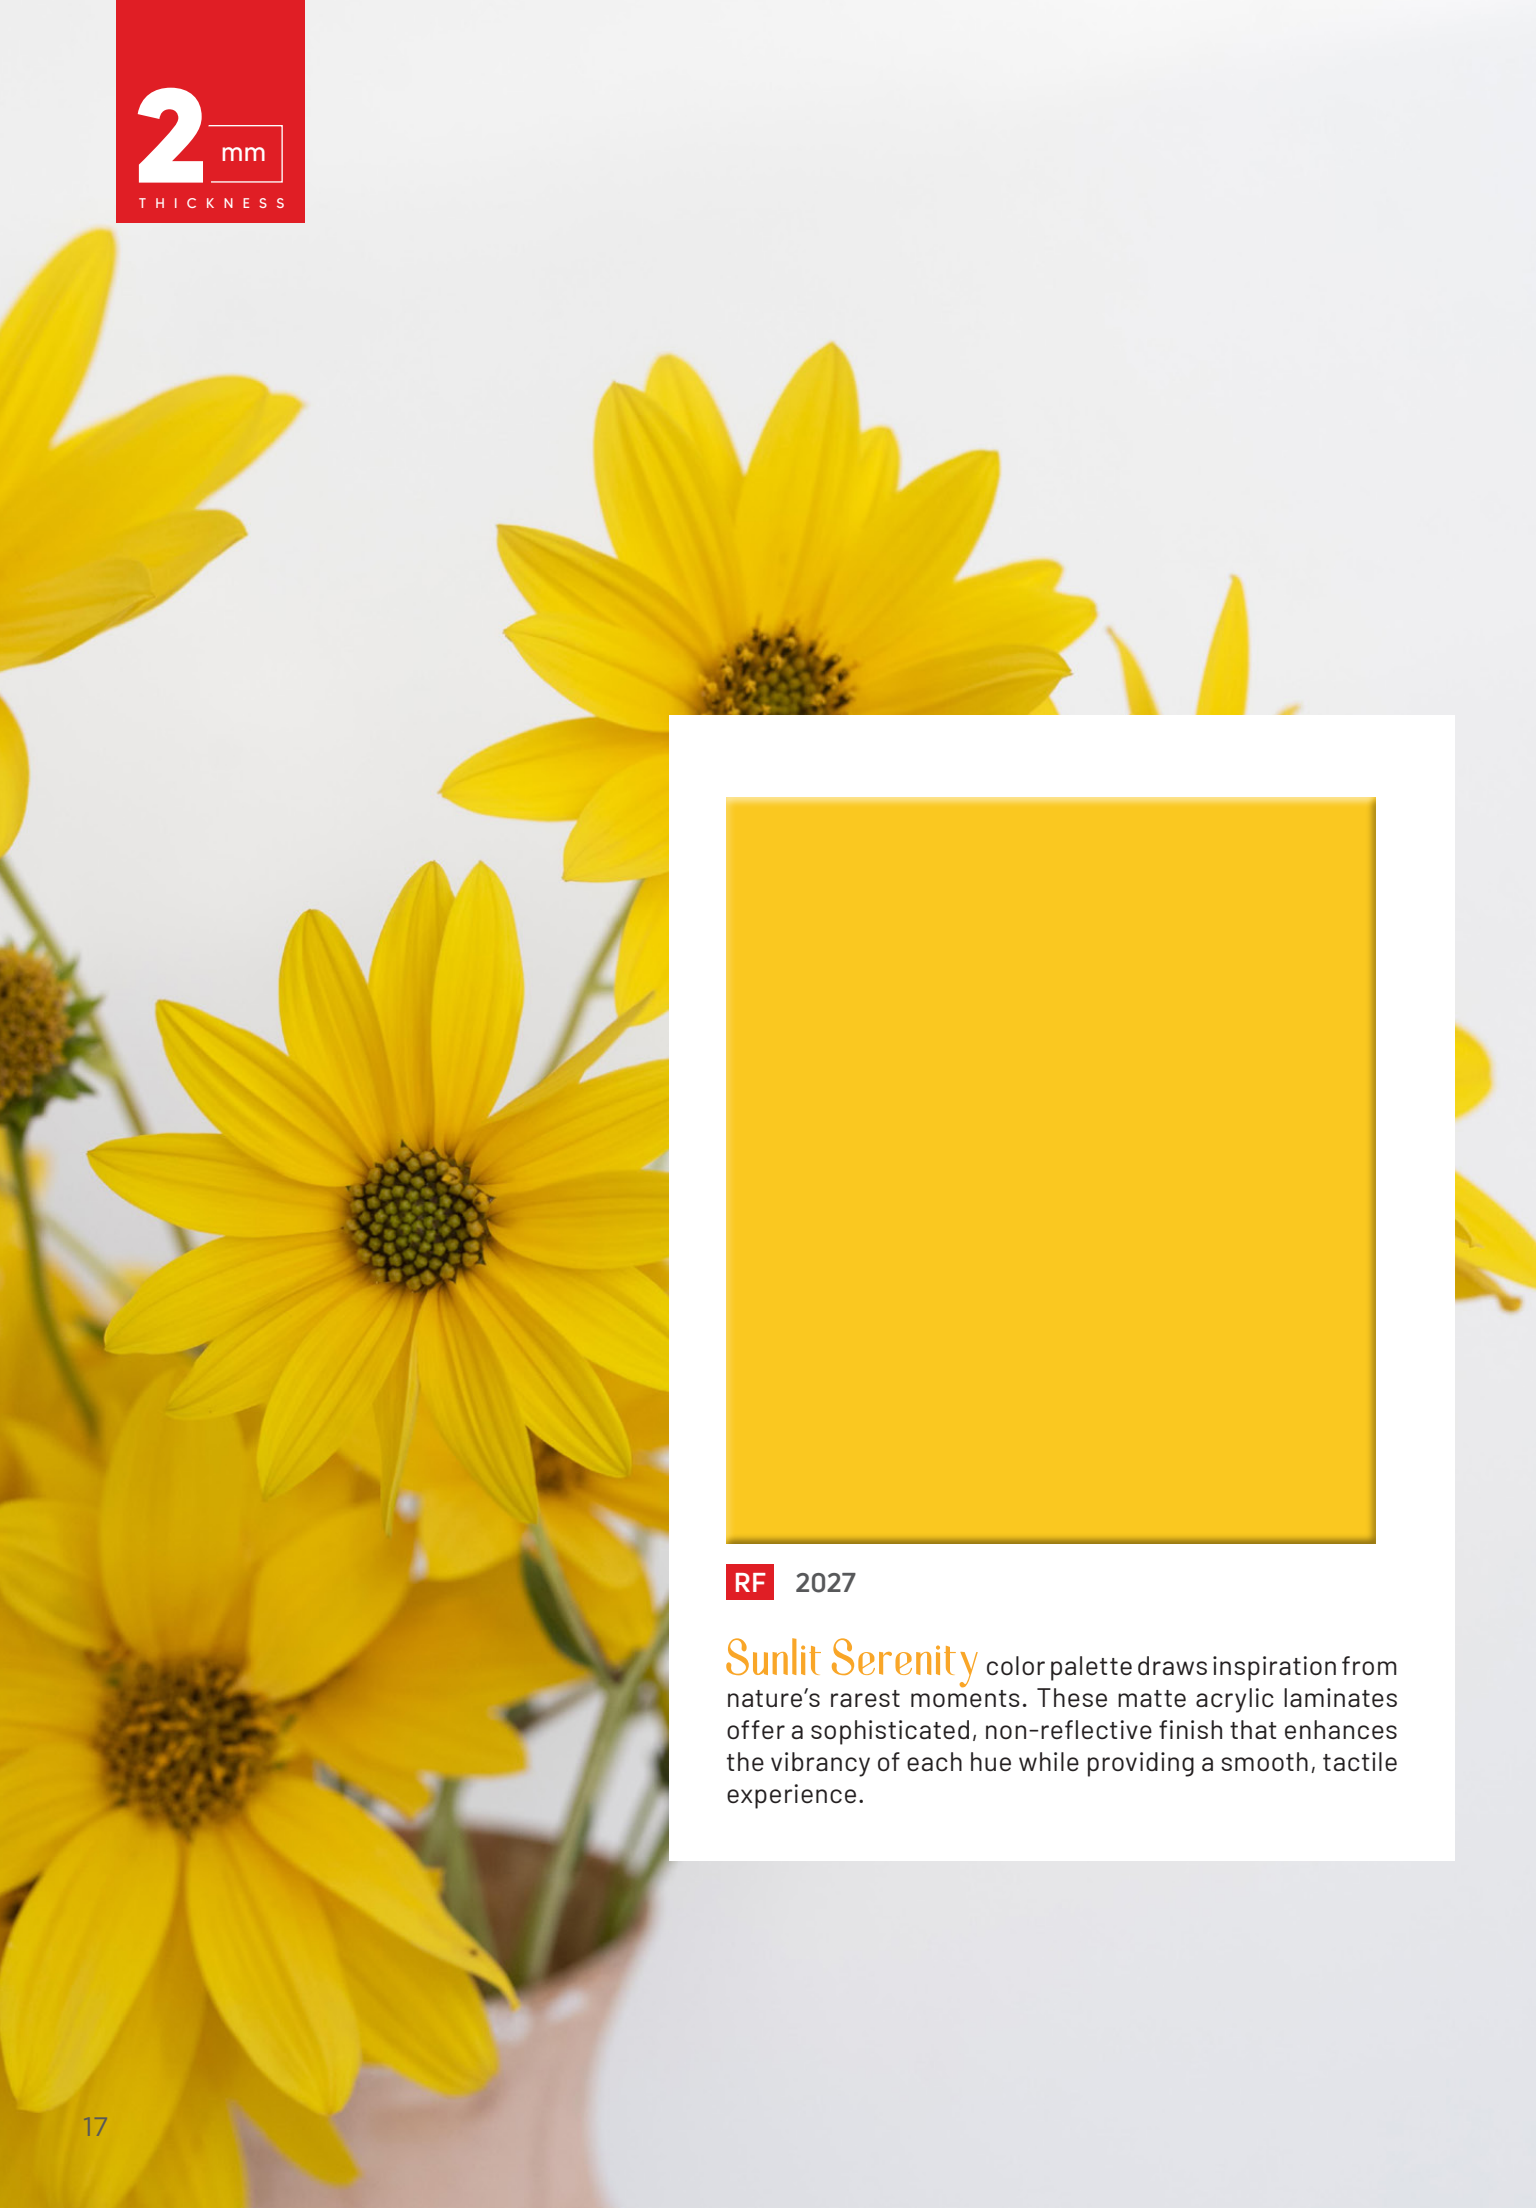


RF 2027


Sunlit Serenity color palette draws inspiration from nature's rarest moments. These matte acrylic laminates offer a sophisticated, non-reflective finish that enhances the vibrancy of each hue while providing a smooth, tactile experience.



FADEDTM
ACRYLIC 2.0



RF 2000



RF 2034



RF 2026




RF 2020

2mm
THICKNESS



RF 2045




RF 2046




FADEDTM
ACRYLIC 2.0


Dreamscape palette draws inspiration from the serene hues of Provence lavender fields at dawn, blended with the soft whispers of a Nordic winter sky. A soothing blend of misty purples, muted lilacs, soft greys with a hint of earthy green.



RF 2022



RF 2055



RF 2033

Features



ANTI
YELLOW



ANTI
BACTERIAL



NO
FORMALDEHYDE



BORER & TERMITE
RESISTANT



6H
HARDNESS



WATER
RESISTANT

Application



HOME



OFFICE



HOTEL



MALL



HOSPITAL






FADEDTM
ACRYLIC 2.0

Faded Gloss

Faded Glossy acrylic laminate with 2mm thickness is ideal for vertical applications, offering a sleek, modern high-gloss finish. Its enhanced strength and lightweight profile ensure durability and ease of installation. Designed to resist warping and maintain luster, it's a top choice for residential and commercial interior projects.




2mm
THICKNESS




RF 1052


Soft Neutrals, ranging from creamy whites to warm taupes, are infused with micro-minerals that reflect light in a diffused manner, giving them a unique, almost ethereal glow. These colors are inspired by the natural hues of desert sands and moonlit stones, offering a timeless palette that feels both modern and grounded.



RF 1001



RF 1002

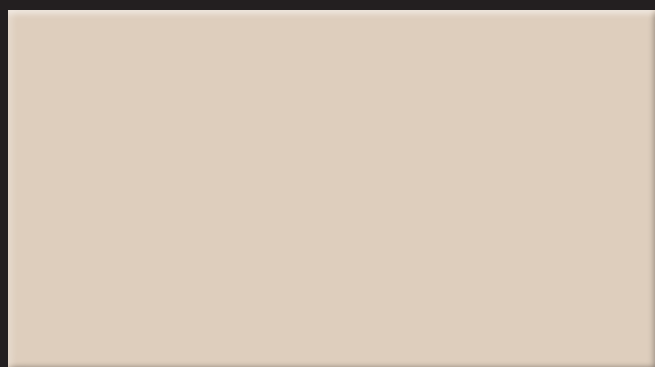


RF 1053





RF 1061




Whispering Dunes - Each shade is meticulously crafted to embody the raw, understated beauty of an untouched desert expanse. These colors capture the shadowy stillness of desert stone.

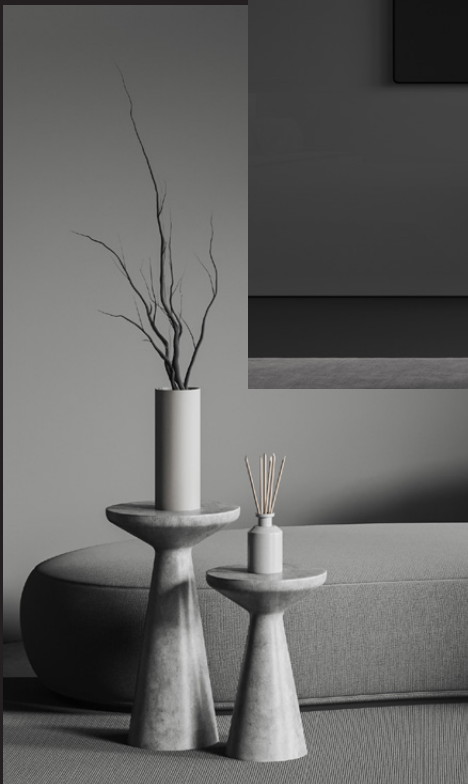

gentle

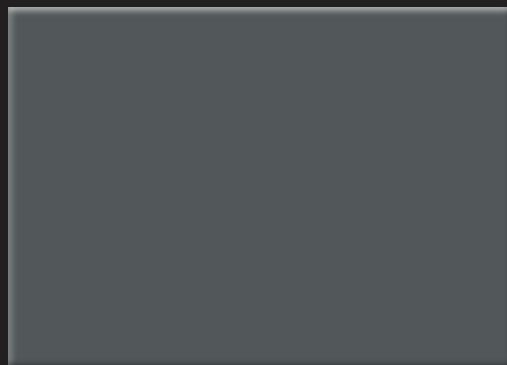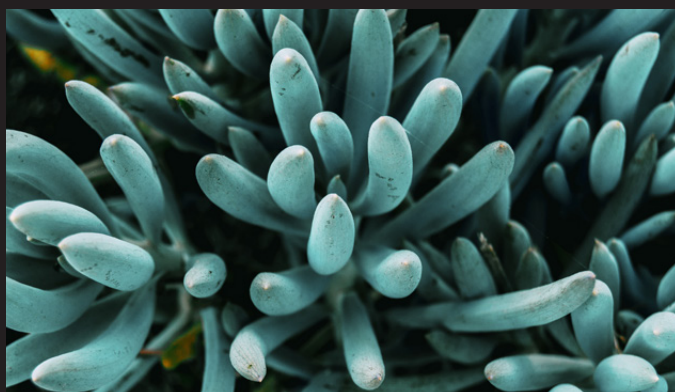


RF 1016



RF 1028




RF 1000

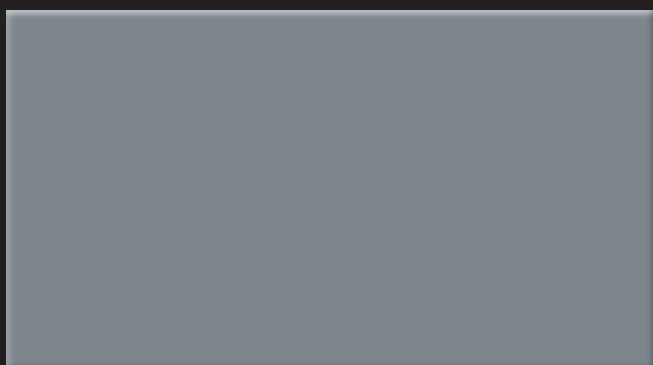

RF 1059



impressions

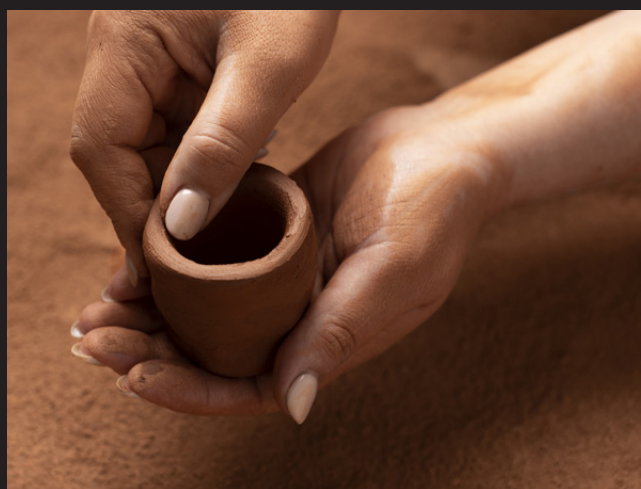

Rang[®]
RANGE OF DECORATIVE PRODUCTS

FADED[™]
ACRYLIC 2.0



Faded is a collection you must not miss. Crafted with high-quality acrylic, our acrylic laminates are designed for durability, resisting scratches and fading while maintaining their subtle, nature-inspired elegance, making them a perfect choice for those seeking to infuse spaces with a quiet, harmonious charm.


MATCHING EDGE BANDING

RANG EDGE BAND		
1	RF 2001	8001
2	RF 2002	8002
3	RF 2016	8007
4	RF 2018	8015
5	RF 2029	8005
6	RF 2043	8011
7	RF 2051	8015
8	RF 2053	8020
9	RF 2055	8003
10	RF 2058	8016
11	RF 2061	8004


REHAU EDGE BAND		
12	RF 2003	75705
13	RF 2007	110135
14	RF 2009	75712
15	RF 2013	75705
16	RF 2022	75609
17	RF 2027	75743
18	RF 2035	110119
19	RF 2036	75633
20	RF 2020	75710
21	RF 2057	75703
22	RF 2060	75733

E3 EDGE BAND		
23	RF 2000	1001
24	RF 2017	1004
25	RF 2045	1101
26	RF 2050	1054

HAVE YOU VISITED
OUR INSTAGRAM
PROFILE YET?



Scan QR code
and Follow

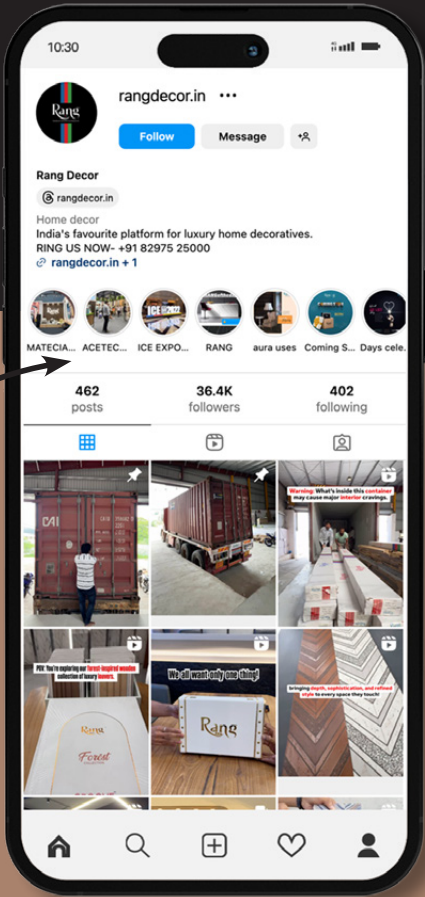

Sr. No.	Desing No.	Pg. No.
1	RF 1000	26
2	RF 1001	24
3	RF 1002	24
4	RF 1016	26
5	RF 1028	26
6	RF 1052	23
7	RF 1053	24
8	RF 1059	26
9	RF 1061	24
10	RF 2000	2, 18
11	RF 2001	2
12	RF 2002	2, 6
13	RF 2003	4
14	RF 2005	14
15	RF 2007	8
16	RF 2009	13
17	RF 2013	4
18	RF 2014	14
19	RF 2016	10
20	RF 2017	14
21	RF 2018	4
22	RF 2019	11
23	RF 2020	18
24	RF 2021	15
25	RF 2022	12, 20
26	RF 2026	18
27	RF 2027	17

Sr. No.	Desing No.	Pg. No.
28	RF 2028	16
29	RF 2029	10
30	RF 2030	16
31	RF 2031	16
32	RF 2033	16, 20
33	RF 2034	18
34	RF 2035	8
35	RF 2036	5
36	RF 2042	12
37	RF 2043	16
38	RF 2045	19
39	RF 2046	19
40	RF 2047	11
41	RF 2048	12
42	RF 2049	12
43	RF 2050	4
44	RF 2051	6
45	RF 2052	6
46	RF 2053	6
47	RF 2055	5, 20
48	RF 2056	4
49	RF 2057	3
50	RF 2058	14
51	RF 2059	14
52	RF 2060	10
53	RF 2061	8



Rang[®]

RANGE OF DECORATIVE PRODUCTS

OUR RANGE OF PRODUCTS

LITIA[®]
FLUTED ACRYLIC

MASKARA[®]
6H ACRYLIC LAMINATE

Charco[®]
CHARM
DECORATIVE CHARCOAL PANELS

ONIT[®]
SEAMLESS CHARCOAL

ART BY ONE[®]
DECORATIVE LOUVERS

CANIS[®]
PREMIUM MDF SLATS

GROOVE[®]
FOREST COLLECTION
LOUVERS

GROOVE[®]
EARTH COLLECTION
LOUVERS

GROOVE[®]
PASTEL COLLECTION
LOUVERS

**POWER
BOARD**
500 X PVC, WPC BOARD

**ECO
BOARD**
AFFORDABLE WPC BOARD

**HYBRID
BOARD**
600 X PVC, WPC BOARD

FADED[™]
ACRYLIC 2.0

WALLMATE[™]
DECORATIVE LOUVERS

BERN[®]
THE META THERMO LAM

NAZRANA[®]
ENGRAVED ACRYLIC

OHHO[®]
PREMIUM MICA

MDF
INTERIO | EXTERIO | XDHMR



rangdecor.in
Follow us on :   

25
26